

# Product Specifications

Receiving card

**HD-R516**

V0.1 20190829

## 1. Overview


R516, on-board 16\*HUB75E ports, compatible with R500 / R501 / R5018 / R512 / R508 / R612.

## 2. Parameters


|                               |   |
|-------------------------------|---|
| <b>With sending card</b>      | Dual-mode sending box, Asynchronous sending card, Synchronous sending card, Video processor of VP series.                                 |
| <b>Module type</b>            | Compatible with all common IC module, supported most PWM IC module.   |
| <b>Scan mode</b>              | Supports any scanning method from static to 1/64 scan   |
| <b>Communication method</b>   | Gigabit Ethernet  |
| <b>Control range</b>          | Recommend: 256*512 pixels<br>Outdoor module width $\leq 256$ , Indoor module width $\leq 128$   |
| <b>Multi-card connection</b>  | Receiving card can be put in any sequence.  |
| <b>Gray scale</b>             | 256~65536   |
| <b>Smart setting</b>          | A few simple steps to complete the smart settings, through the screen layout can be set to go with any alignment of the screen unit board |
| <b>Test functions</b>         | Receiving card integrated screen test function, Test display brightness uniformity and display module flatness.                           |
| <b>Communication distance</b> | Super Cat5, Cat6 network cable within 146 meters  |
| <b>Port</b>                   | 5V DC Power*2, 1Gbps Ethernet port*2, HUB75E*16   |
| <b>Input voltage</b>          | 4V-6V   |
| <b>Power</b>                  | 5W  |

### 3. Connection Method


Connection diagram of connecting R516 with player A6:

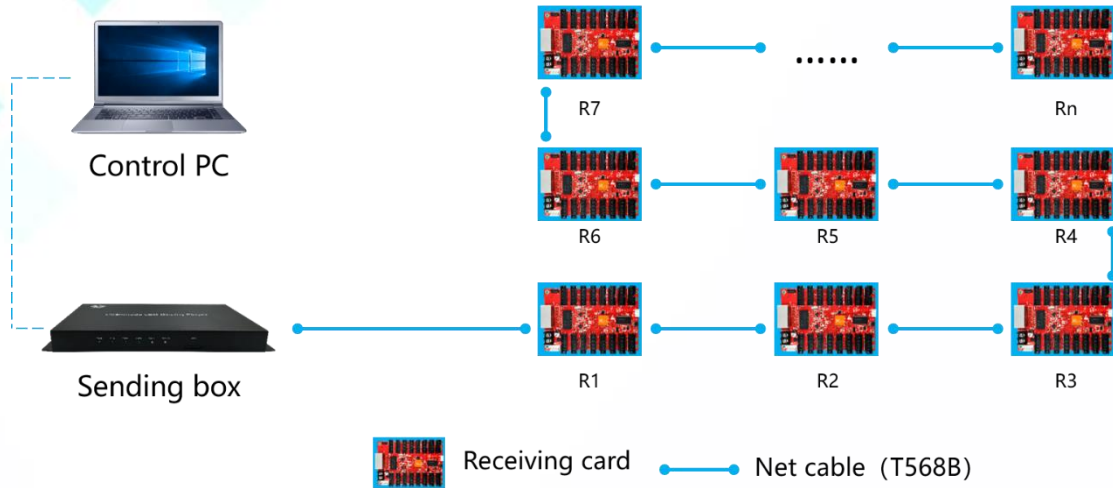


### 4. Dimensions

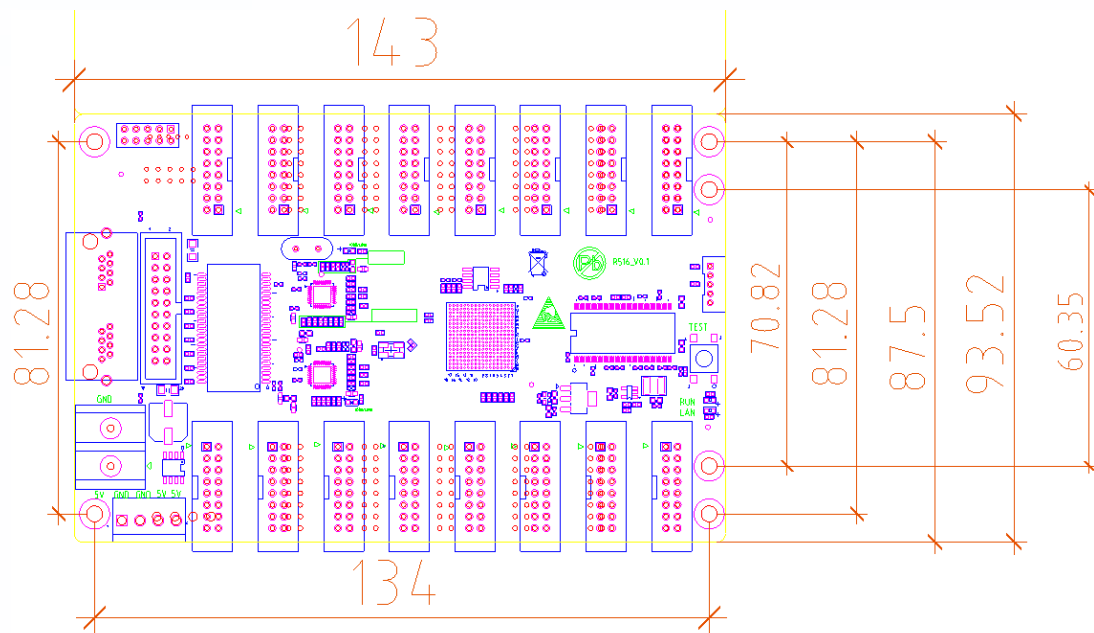

## 5. Interface definition

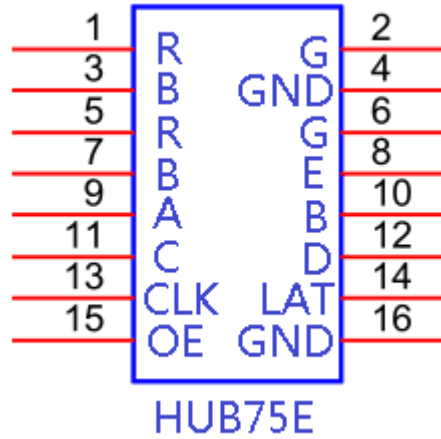

## 6. Appearance Description

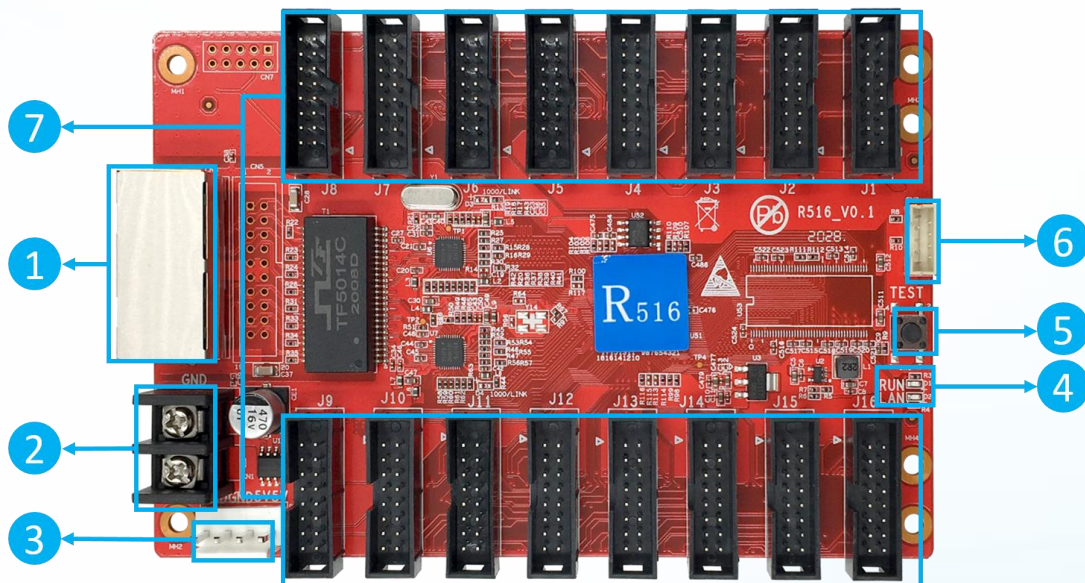

①: Gigabit Ethernet port, used to connect the sending card or receiving card, the same two network ports are interchangeable,



- ②： Power interface, can be accessed with 4.5V ~ 5.5V DC voltage;
- ③： Power interface, can be accessed with 4.5V ~ 5.5V DC voltage; (②,③ connect one of them is ok.)
- ④： Work indicator, D1 flashes to indicate that the control card is running normally; D2 flashes quickly to indicate that Gigabit has been recognized and data is being received.
- ⑤： Test button, used to test display brightness uniformity and display module flatness.
- ⑥： External indicator light, run light and data light,
- ⑦： HUB75Eport, connect to the modules.

## 7. Technical Parameters

|   | Minimum       | Typical | Maximum |
|---|---------------|---------|---------|
| <b>Rated voltage(V)</b>                 | 4.2           | 5.0     | 5.5     |
| <b>Storage temperature(°C)</b>          | -40           | 25      | 105     |
| <b>Work environment temperature(°C)</b> | -40           | 25      | 80      |
| <b>Work environment humidity (%)</b>    | 0.0           | 30      | 95      |
| <b>Net weight (kg)</b>                  | 0.103         |         |         |
| <b>Certificate</b>                      | CE, FCC, RoHS |         |         |

## Precautions

- 1) ensure the system long-term stable running, please keep to use the standard 5V power supply voltage.

